



**BOSS**  
**70-25**

**45/70** PRIME/PEAK  
**kVA** POWER

**20X**

UP TO 20X THE  
CYCLE LIFE OF  
NMC/LFP BATTERIES



SAFE BATTERY  
TECHNOLOGY  
NO THERMAL RUNAWAY



WIDEST  
TEMPERATURE  
OPERATING RANGE

**1Φ AND 3Φ**

SIMULTANEOUS  
OUTPUT  
VOLTAGES




REMOTE ACCESS  
MONITORING &  
TRACKING



INDUSTRIAL  
GRADE  
INVERTERS



**25 kWh**  
**ULTRA**  
**HIGH CYCLE**  
**LITHIUM**  
**TITANATE**  
**OXIDE (LTO)**  
**BATTERY CHEMISTRY**  
PATENTS PENDING

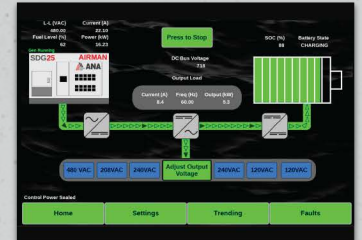

1 | 10" Touchscreen Control Panel with color display



2 | Simultaneous Voltage Output Panel  
120V - 20A x 2 | 240V - 50A x 3  
1Φ 240V & 3Φ 208/480v Cam-Locks™



6 | Telematics Monitoring System  
Remote access and monitoring of fuel, runtime, GPS, load and more



8 | External Fuel Tank Connections with 3-Way Selection Valve

\*This is a digital rendering and does not reflect EXACT unit. Final look and features subject to change.

**PERFORMANCE //**

- 1 - 10" Touchscreen Control Panel
- 2 - Simul. Voltage Output Panel
- 3 - Emergency Stop Button
- 4 - Delta Demand Excitation™
- 5 - Quietech™ Sound Attenuation
- 6 - Telematics Monitoring System

**MAINTENANCE //**

- 7 - Lift-off Door Hinges
- 8 - Ext. Fuel Tank Connections
- 9 - 110% Fluid Containment
- 10 - Service Extensions
- 11 - Fuel & Containment Drains
- 12 - Removable Trailer Fenders

**CONSTRUCTION //**

- 13 - Power-coated Steel Enclosure
- 14 - Stainless Steel Hardware
- 15 - Lockable Access Doors
- 16 - Automotive Door Seals
- 17 - 80.5 Gallon Fuel Tank
- 18 - Heavy-Duty Steel Trailer



**ISUZU® 4LE2X**  
Tier 4 / CARB  
Diesel Engine



\*This is a digital rendering and does not reflect EXACT unit. Final look and features subject to change.

**IMPROVE FUEL ECONOMY // LOWER CARBON EMISSIONS // REDUCE NOISE LEVELS**  
**THE INDUSTRY'S HIGHEST-QUALITY HYBRID POWER SYSTEMS**

# HYBRID ENERGY SYSTEM MODEL BOSS70-25



SPECIFICATIONS	BOSS70-25
HYBRID ENERGY SYSTEM	ANA Energy Boss™
<b>MAXIMUM INTERMITTENT POWER OUTPUT</b>	(Battery SOC Greater than 5%)
THREE-PHASE	70 kVA / 56 kW
SINGLE-PHASE	47 kVA / 37 kW
FREQUENCY	60 Hz
VOLTAGE (THREE-PHASE), SIMULTANEOUS	120 / 208 / 277 / 480
VOLTAGE (SINGLE-PHASE), SIMULTANEOUS	120 / 240
VOLTAGE REGULATION	Adjustable
<b>MAXIMUM CONTINUOUS POWER OUTPUT</b>	(Battery SOC at 0%)
GENERATOR	Airman SDG45
GENERATOR CHARGE RATE	45 kVA / 36 kW
THREE-PHASE OUTPUT	42 kVA / 33 kW
SINGLE-PHASE OUTPUT	28 kVA / 22 kW
SIMULTANEOUS VOLTAGE (THREE-PHASE)	120 / 208 / 277 / 480
SIMULTANEOUS VOLTAGE (SINGLE-PHASE)	120 / 240
<b>CONTROLS</b>	
CONTROL PANEL	10" Full Color Touch Screen
TELEMATICS	Generator & Energy Boss™
ESG REPORTING	Yes
<b>TECHNOLOGY</b>	
BATTERY CHEMISTRY	Lithium Titanate Oxide (LTO)
BATTERY CAPACITY	25 kWh
TOTAL BATTERY LIFE OR ENERGY THROUGHOUT	2,000 MWh
CHARGE TIME (NO LOAD)	≈ 45 Minutes
INVERTER OUTPUT MAX	56 kW
<b>BATTERY LIFE*</b>	
BATTERY TYPE	Lithium Titanate Oxide (LTO)
BATTERY SIZE	25 kWh
EST. CYCLE LIFE @ 77°F ENCLOSURE TEMPERATURES	90K Cycles at 90% DOD
EST. CYCLE LIFE @ 100°F ENCLOSURE TEMPERATURES	80K Cycles at 90% DOD
BATTERY LIFE (100°F @ 3 kW AVERAGE LOAD)	41 Years
<b>OPERATING TEMPERATURES</b>	
INVERTER COLD START TEMPERATURE (MINIMUM)	14°F
RUNNING OPERATING TEMPERATURE	-22°F to 130°F
ARCTIC PACKAGE OPERATING TEMP. (OPTIONAL)	-50°F to 130°F
BATTERY CHARGING TEMPERATURE	-22°F to 130°F
<b>FEATURES &amp; OPTIONS</b>	
TRAILER MOUNT	Available
SKID MOUNT	Available
ROOF MOUNTED SOLAR FOR EBOSS BATTERY, 3 PANELS (1.6 kW)	Q1 - 2024
PARALLEL CAPABILITY	Available
COLD WEATHER/ARCTIC PACKAGES	Available

\*Battery expected to retain 95% of its life after 7 years under 24/7 operation at 3kW average load.

All specifications are subject to change without prior notice. Contact ANA Inc. for the most current information.

## ANA ENERGY BOSS™ HYBRID ENERGY SYSTEMS BENEFITS

- Increased Fuel Efficiency
- Reduced Green House Gas Emissions
- Cost Effective High ROI
- Minimize Noise / Maximize Quiet Time
- Eliminate Maintenance Needs and Operational Hours by up to 75%
- Remote Access and Monitoring

WEIGHTS & DIMENSIONS	
L x W x H (EBOSS ONLY)	55" x 44" x 62"
EBOSS WEIGHT ONLY	2,513 lbs
L x W x H (TRAILER AND GENERATOR)	167" x 71" x 76"
TOTAL WEIGHT (WITHOUT/WITH FUEL)	5988 / 6560 lbs
INTEGRAL FUEL TANK CAPACITY	80.5 gal
GENERATOR COLD WEATHER OPTIONS	
BLOCK HEATER   CCV HEATER	Available at Launch
FUEL FILTER HEATER   FUEL TANK HEATER	Available at Launch
BATTERY BLANKET	Available at Launch
ENERGY BOSS COLD WEATHER OPTIONS	
Enclosure Heater	Available at Launch
Magnetic Ventillation Covers	Available at Launch
WARRANTY	
ENERGY BOSS™ ONLY	2 Years
ENERGY BOSS™ WITH TRAILER & GENERATOR	2 Years, 2000 Hours
MANUFACTURER BATTERY WARRANTY	7 Years
SERVICE & SUPPORT	24/7, 365 Days
TRAINING	Henderson, NV or On Location

## Energy Boss Solar 1.6

Solar Power to help charge your Energy Boss Battery System during the day



- Utility Scale Mono Bifacial Solar Modules
- High Powered 3-Phase Quad Microinverter
- UL1741/ CSA C22.2 No. 107.1-16/ UL1741SA/ UL1741SB/ IEEE1547
- Integrated Safety Protection
  - 96.5% Peak Efficiency
- Custom Solar Drawer with Locking Mechanism
  - IRA Compliant

SOLD AND SERVICED BY

**ANA Nevada**

1740 Raiders Way  
Henderson, NV 89052

**ANA S. California**

11100 Hope Street  
Cypress, CA 90630

**ANA N. California**

1315 Vinci Avenue  
Sacramento, CA 95838

**ANA South Carolina**

1335 Hayne Street  
Spartanburg, SC 29301



**ANA, Inc.**  
Executive Office

1770 Raiders Way, Henderson, NV 89052

**ANACORP.COM**

(562) 450-3570 // sales@anacorp.com



**ANA®**

We make your world easier.

© 2023 Alliance North America, Inc. All rights reserved.

Airman® is a registered trademark of Hokuetsu Industries Co. Ltd. Energy Boss™ is a trademark of Spoc Grid Inverter Technologies. All other trademarks are property of their respective owners.  
Form EBOSSREV0523